




QUAD 2-INPUT MULTIPLEXER


The MC74F158A is a high-speed quad 2-input multiplexer. It selects four bits of data from two sources using the common Select and Enable inputs. The four buffered outputs present the selected data in the inverted form. The F158A can also generate any four of the 16 different functions of two variables.

- AC Enhanced Version of the F158

CONNECTION DIAGRAM DIP (TOP VIEW)

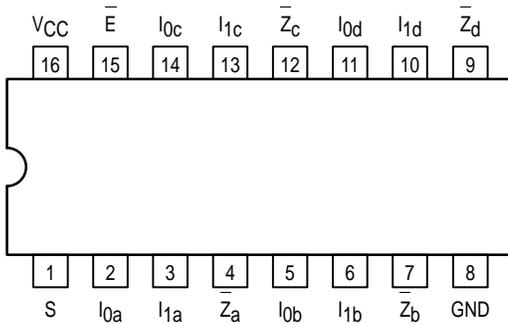

LOGIC DIAGRAM

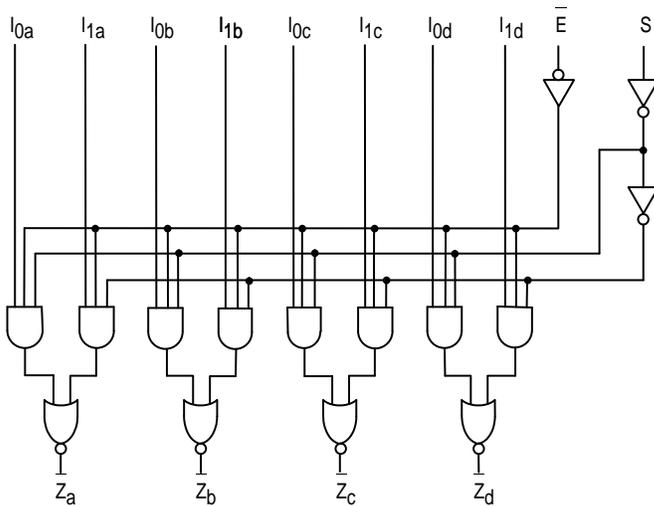


FUNCTION TABLE

| Inputs | | | | Output |
|-----------|---|-------|-------|--------|
| \bar{E} | S | I_0 | I_1 | Z |
| H | X | X | X | H |
| L | L | L | X | H |
| L | L | H | X | L |
| L | H | X | L | H |
| L | H | X | H | L |


H = HIGH Voltage Level; L = LOW Voltage Level; X = Don't Care

MC74F158A


QUAD 2-INPUT MULTIPLEXER FAST™ SHOTTKY TTL



J SUFFIX
CERAMIC
CASE 620-09



N SUFFIX
PLASTIC
CASE 648-08




D SUFFIX
SOIC
CASE 751B-03

ORDERING INFORMATION

MC74FXXXJ Ceramic
MC74FXXXN Plastic
MC74FXXXD SOIC

LOGIC SYMBOL

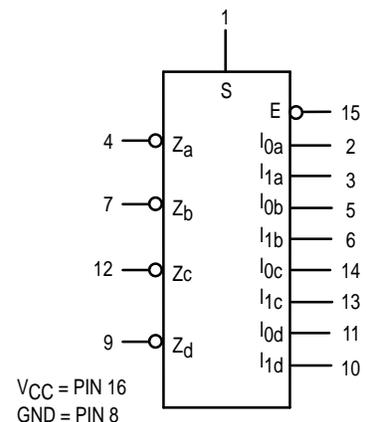

LIFETIME BUY

LAST SHIP 30/09/99
LAST ORDER 31/03/99

MC74F158A

GUARANTEED OPERATING RANGES

| Symbol | Parameter | | Min | Typ | Max | Unit |
|-----------------|-------------------------------------|----|-----|-----|------|------|
| V _{CC} | Supply Voltage | 74 | 4.5 | 5.0 | 5.5 | V |
| T _A | Operating Ambient Temperature Range | 74 | 0 | 25 | 70 | °C |
| I _{OH} | Output Current — High | 74 | | | -1.0 | mA |
| I _{OL} | Output Current — Low | 74 | | | 20 | mA |

DC CHARACTERISTICS OVER OPERATING TEMPERATURE RANGE (unless otherwise specified)

| Symbol | Parameter | Limits | | | Unit | Test Conditions | |
|-----------------|---------------------------------------|--------|------|------|------|---|--------------------------|
| | | Min | Typ | Max | | | |
| V _{IH} | Input HIGH Voltage | 2.0 | | | V | Guaranteed Input HIGH Voltage | |
| V _{IL} | Input LOW Voltage | | | 0.8 | V | Guaranteed Input LOW Voltage | |
| V _{IK} | Input Clamp Diode Voltage | | | -1.2 | V | I _{IN} = -18 mA | V _{CC} = MIN |
| V _{OH} | Output HIGH Voltage | 74 | 2.7 | 3.4 | V | I _{OH} = -1.0 mA | V _{CC} = 4.75 V |
| | | 74 | 2.5 | | | | V _{CC} = 4.50 V |
| V _{OL} | Output LOW Voltage | | 0.35 | 0.5 | V | I _{OL} = 20 mA | V _{CC} = MIN |
| I _{IH} | Input HIGH Current | | | 20 | μA | V _{IN} = 2.7 V | V _{CC} = MAX |
| | | | | 100 | μA | V _{IN} = 7.0 V | |
| I _{IL} | Input LOW Current | | | -0.6 | mA | V _{IN} = 0.5 V | V _{CC} = MAX |
| I _{OS} | Output Short Circuit Current (Note 2) | -60 | | -150 | mA | V _{OUT} = 0 V | V _{CC} = MAX |
| I _{CC} | Power Supply Current (Note 3) | | 10 | 15 | mA | V _{CC} = MAX, V _{IN} = HIGH | |

NOTES:

- For conditions shown as MIN or MAX, use the appropriate value specified under guaranteed operating ranges.
- Not more than one output should be shorted at a time, nor for more than 1 second.
- I_{CC} measured with outputs open and 4.5 V applied to all inputs.

AC CHARACTERISTICS

| Symbol | Parameter | 74F | | 74F | | Unit |
|------------------|-----------------------------|--|-----|--|-----|------|
| | | T _A = +25°C V _{CC} = +5.0 V C _L = 50 pF | | T _A = 0°C to 70°C V _{CC} = 5.0 V ±10% C _L = 50 pF | | |
| | | Min | Max | Min | Max | |
| t _{PLH} | Propagation Delay | 3.0 | 8.5 | 3.0 | 9.5 | ns |
| t _{PHL} | S to \bar{Z} | 2.5 | 6.5 | 2.5 | 7.0 | |
| t _{PLH} | Propagation Delay | 2.5 | 6.0 | 2.5 | 7.0 | ns |
| t _{PHL} | \bar{E} to \bar{Z}_n | 2.0 | 6.0 | 2.0 | 6.5 | |
| t _{PLH} | Propagation Delay | 2.0 | 5.9 | 2.0 | 7.0 | ns |
| t _{PHL} | I _n to \bar{Z} | 1.0 | 4.0 | 1.0 | 4.5 | |

FUNCTIONAL DESCRIPTION

The F158A quad 2-input multiplexer selects four bits of data from two sources under the control of a common Select input (S) and presents the data in inverted form at the four outputs. The Enable input (E) is active LOW. When E is HIGH, all of the outputs (Z) are forced HIGH regardless of all other inputs. The F158A is the logic implementation of a 4-pole, 2-position switch where the position of the switch is determined by the logic levels supplied to the Select input.

A common use of the F158A is the moving of data from two groups of registers to four common output busses. The particular register from which the data comes is determined by the state of the Select input. A less obvious use is as a function generator. The F158A can generate four functions of two variables with one variable in common. This is useful for implementing gating functions.

LIFETIME BUY

LAST SHIP 30/09/99
LAST ORDER 31/03/99

Mfax is a trademark of Motorola, Inc.

Motorola reserves the right to make changes without further notice to any products herein. Motorola makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does Motorola assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation consequential or incidental damages. "Typical" parameters which may be provided in Motorola data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. Motorola does not convey any license under its patent rights nor the rights of others. Motorola products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the Motorola product could create a situation where personal injury or death may occur. Should Buyer purchase or use Motorola products for any such unintended or unauthorized application, Buyer shall indemnify and hold Motorola and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that Motorola was negligent regarding the design or manufacture of the part. Motorola and  are registered trademarks of Motorola, Inc. Motorola, Inc. is an Equal Opportunity/Affirmative Action Employer.

How to reach us:

USA/EUROPE/Locations Not Listed: Motorola Literature Distribution; P.O. Box 5405, Denver, Colorado 80217.
1-303-675-2140 or 1-800-441-2447

JAPAN: Motorola Japan Ltd.; SPS, Technical Information Center, 3-20-1, Minami-Azabu, Minato-ku, Tokyo 106-8573 Japan.
81-3-3440-3569

ASIA/PACIFIC: Motorola Semiconductors H.K. Ltd.; Silicon Harbour Centre, 2 Dai King Street, Tai Po Industrial Estate, Tai Po, N.T., Hong Kong. 852-26668334

Customer Focus Center: 1-800-521-6274

Mfax™: RMFAX0@email.sps.mot.com – TOUCHTONE 1-602-244-6609
Motorola Fax Back System – US & Canada ONLY 1-800-774-1848
– <http://sps.motorola.com/mfax/>

HOME PAGE: <http://motorola.com/sps/>

