



SSMA射频同轴连接器具有体积小、机械电气性能优越、可靠性高等优点，是近年来通讯行业选用的射频连接器。

Series SSMA RF Coaxial conneltors have the advantages of small. super mechanical and electrical performances, high rebility, etc. The products are widely used in the field of communication.



主要技术特性		KEY PERFORMANCE	
温度范围 Temperature range	-55 ~ +155℃	绝缘电阻 Insulation resistance	$\geq 1000\text{M}\Omega$
特性阻抗 Characteristic Impedance	50 Ω	介质耐压 Dielectric Withstanding voltage	750V
频率范围 Frequency range	0~30GHz	接触电阻 Contact resistance	中心导体 Center conductor $\leq 0.006\Omega$
			外导体 Outer conductor $\leq 0.0025\Omega$
电压驻波比 VSWR	$\leq 1.07 + 0.01f$	寿命 Durability	500 Cycles


头部配合尺寸 INTERFACE MATING DIMENSIONS

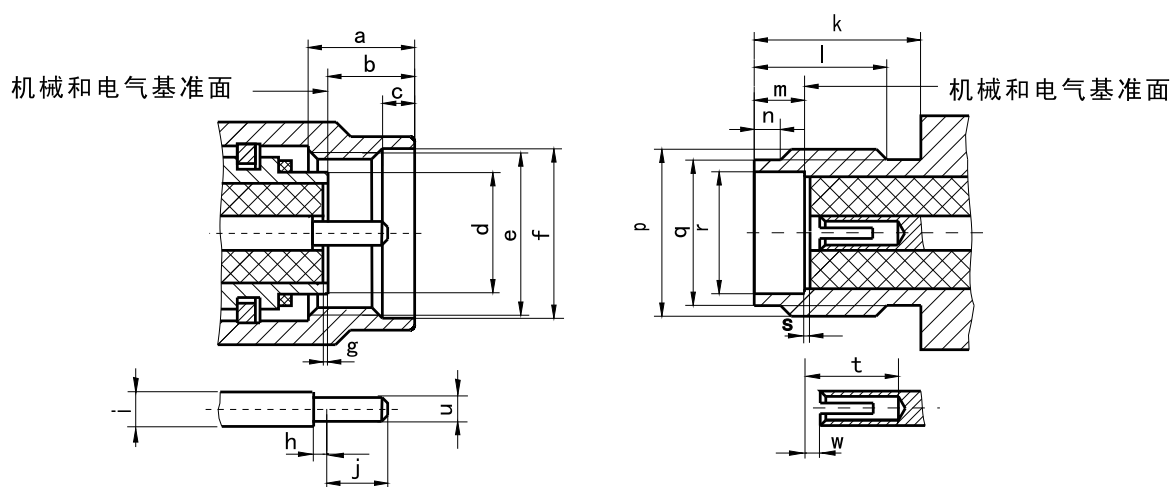

Symbol	MIN(mm)	MAX(mm)	Symbol	MIN(mm)	MAX(mm)	Symbol	MIN(mm)	MAX(mm)
a	3.30	—	h	0.00	0.25	p	10-36UNS-2A	
b	2.54	3.38	i	$\Phi 0.85$	$\Phi 0.88$	q	$\Phi 3.89$	$\Phi 4.06$
c	0.38	1.14	j	1.27	1.65	r	$\Phi 3.23$	$\Phi 3.3$
d	$\Phi 3.15$	$\Phi 3.22$	k	5.84	—	s	0.00	0.25
e	10-36UNS-2B		l	4.83	5.33	t	1.91	—
f	$\Phi 4.98$	$\Phi 5.13$	m	1.91	1.96	u	$\Phi 0.49$	$\Phi 0.52$
g	0.00	0.25	n	0.51	1.02	w	0.00	0.25



SSMA-JB2




电缆剥线尺寸



Cable type:SFT-50-2-1




SSMA-KFB2



建议安装开孔尺寸


电缆剥线尺寸

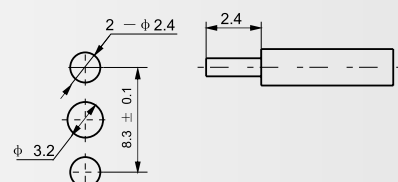

Cable type:SFT-50-2-1





SSMA-J2 等



线夹

电缆剥线尺寸




Type	d	D	Cable type	L
SSMA-J2	$\phi 1$	$\phi 2$	SYV-50-1、SFF-50-1	6
SSMA-J3	$\phi 1.6$	$\phi 2.6$	SYV-50-2-1、SFF-50-1.5-1	6.5

Cable type:SFT-50-2-1





SSMA-JW3 等



线夹


电缆剥线尺寸



Type	d	D	Cable type	L	L1	L2
SSMA-JW2	$\phi 1$	$\phi 2$	SYV-50-1、SFF-50-1	11.4	5.6	6
SSMA-JW3	$\phi 1.6$	$\phi 2.6$	SYV-50-2-1、SFF-50-1.5-1	12	6.5	6.5



SSMA-JWB2




电缆剥线尺寸



Cable type:SFT-50-2-1




SSMA-K2 . K3

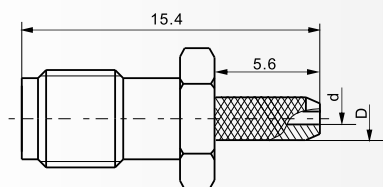

线夹


电缆剥线尺寸

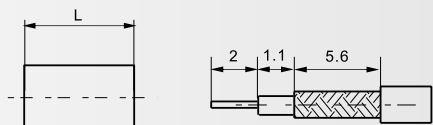

Type	L	d	D	Cable type
SSMA-K2	6	$\phi 1$	$\phi 2$	SFF-50-1, SYV-50-1
SSMA-K3	6.5	$\phi 1.6$	$\phi 2.6$	SFF-50-1.5-1, SYV-50-2-1




SSMA-KYB2



建议安装开孔尺寸


电缆剥线尺寸

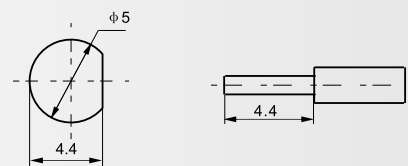


Cable type:SFT-50-2-1




SSMA-KFD

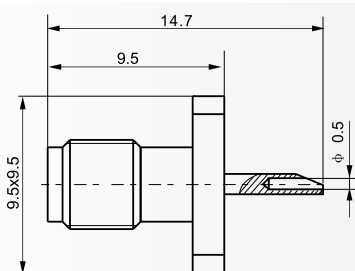


建议安装开孔尺寸



SSMA-KFD1 等

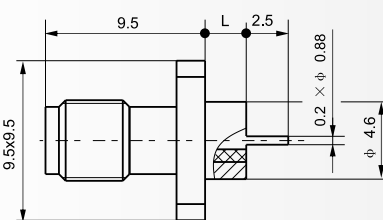


建议安装开孔尺寸




Type	L
SSMA-KFD1	2.4
SSMA-KFD2	3.2
SSMA-KFD3	4.8



SSMA-KFD4

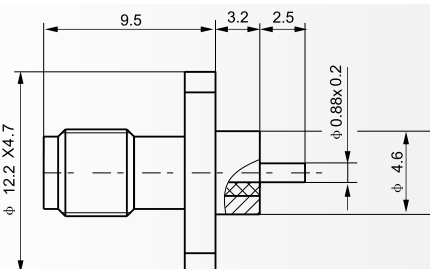


建议安装开孔尺寸






SSMA-KFD7、11




建议安装开孔尺寸




Type	L	L1	L2
SSMA-KFD7	22.2	9.5	3.2
SSMA-KFD11	14	2.5	2.0



SSMA-KFD10




建议安装开孔尺寸




Type	L	L1
SSMA-KFD10	10.7	1.2
SSMA-KFD55	12	2.5



SSMA-KFD12、17

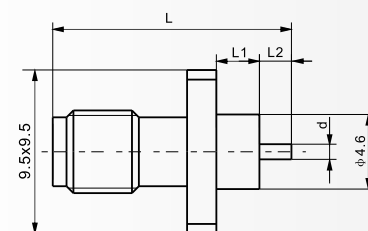


建议安装开孔尺寸




Type	L	L1	L2	d
SSMA-KFD12	14.5	2.4	2.5	1
SSMA-KFD17	13	1.5	2.0	0.88




SSMA-KFD13G

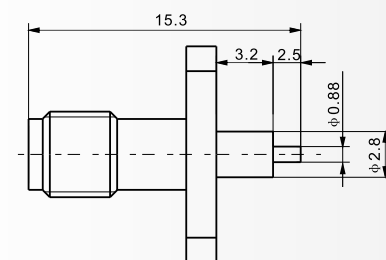


建议安装开孔尺寸



SSMA-KFD14


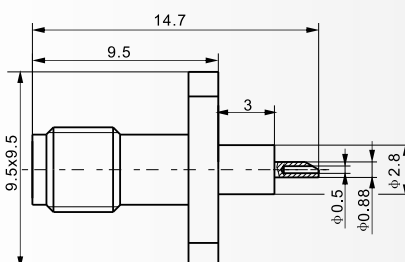


建议安装开孔尺寸









SSMA-KFD9

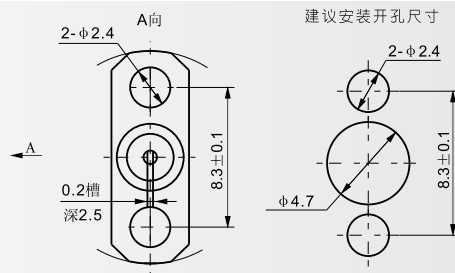



SSMA-KFD19

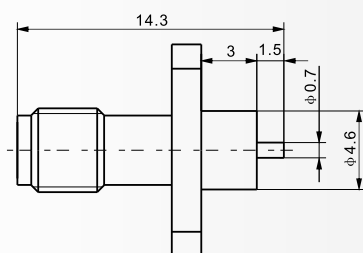

SSMA-KFD20

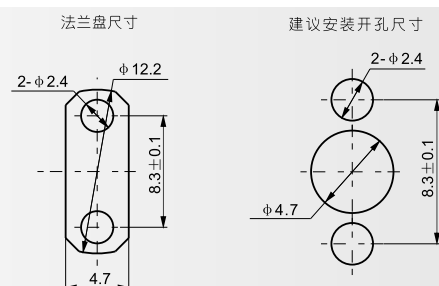



SSMA-KFD21等

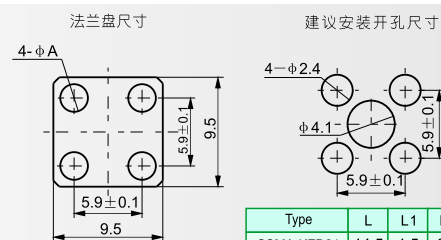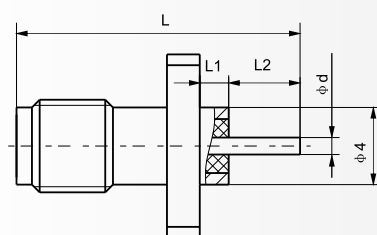

Type	L	L1	L2	d	A
SSMA-KFD21	14.5	1.5	3.5	0.88	2.4
SSMA-KFD29	14	3	1.5	0.6	2.2




SSMA-KFD34 等




Type	L1	d	配接插针	L2	L3	d2
SSMA-KFD8	0.1	$\phi 0.3$	$\phi 0.3$	8.3	4.7	2.4
SSMA-KFD34	0.1	$\phi 0.5$	$\phi 0.48$ - $\phi 0.45$	8.4	4.7	2.4
SSMA-KFD35	0	$\phi 0.3$	$\phi 0.31$ - $\phi 0.28$	8.3	4.7	2.4
SSMA-KFD36	0	$\phi 0.4$	$\phi 0.41$ - $\phi 0.38$	8.3	4.7	2.4
SSMA-KFD39	0	$\phi 0.4$	$\phi 0.38$ - $\phi 0.35$	10.2	5.7	2.6
SSMA-KFD40	0	$\phi 0.4$	$\phi 0.41$ - $\phi 0.38$	8.3	4.7	2.4
SSMA-KFD64	0	$\phi 0.5$	$\phi 0.5$ - $\phi 0.47$	8.3	4.7	2.2




SSMA-KWFD

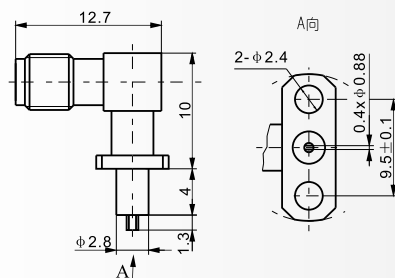


SSMA-KWFD1




建议安装开孔尺寸




SSMA-KWFD2



建议安装开孔尺寸




SSMA-KWFD4等

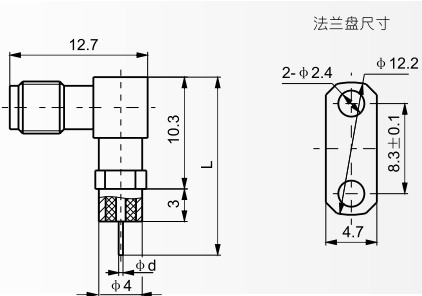

法兰盘尺寸


建议安装开孔尺寸




Type	L	d
SSMA-KWFD6	20.3	0.88
SSMA-KWFD8	16.4	0.4
SSMA-KWFD4	16.9	0.88




SSMA-KHD



A向



建议安装开孔尺寸




SSMA


系列射频同轴连接器
SERIES SSMA COAXIAL CONNECTORS




SSMA-KHD1

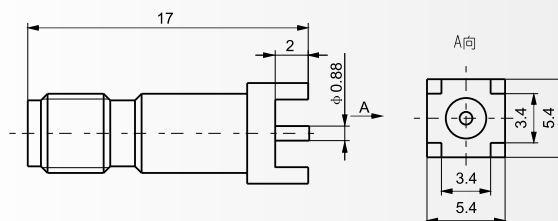


建议安装开孔尺寸




SSMA-KWHD




建议安装开孔尺寸




SSMA-KYD

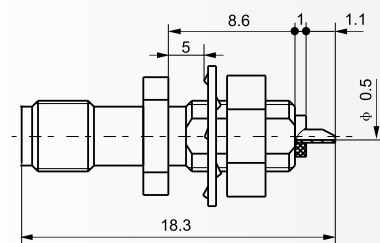


建议安装开孔尺寸




SSMA-KYD1

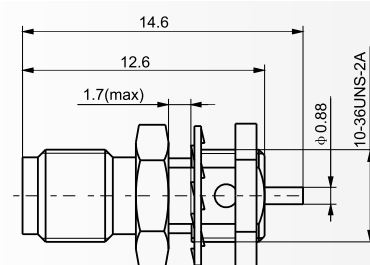

建议安装开孔尺寸




SSMA-KYD2等

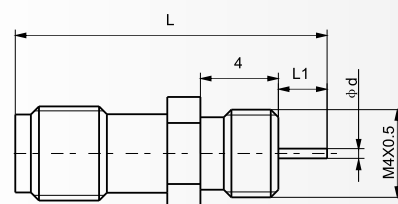

Type	L	L1	d
SSMA-KYD2	16	2.5	0.5
SSMA-KYD3	16.5	3	0.7




SSMA-KYD4

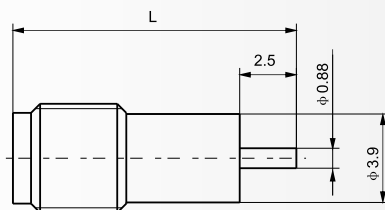


Type	L
SSMA-KYD4	10.5
SSMA-KYD5	12.5




SSMA(M)-KFD

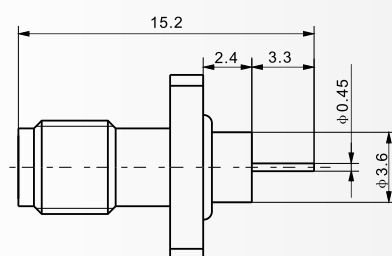


建议安装开孔尺寸




SSMA(M)-KYD

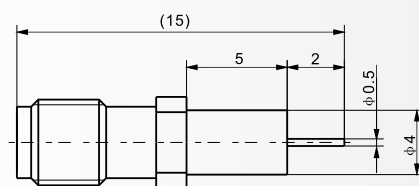


建议安装开孔尺寸



SSMA-KKK

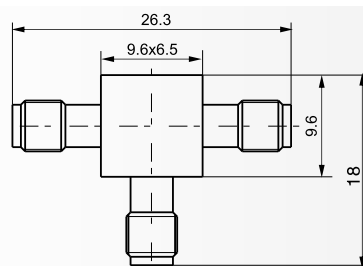


SSMA-KK






SSMA-JJ

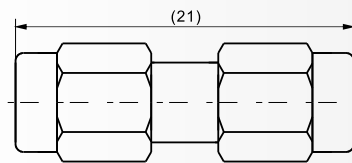


SSMA-KYK

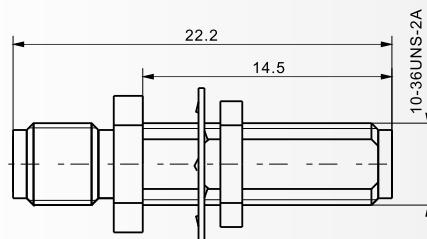


最大穿墙尺寸5mm


建议安装开孔尺寸




SMA/SSMA-KFK




法兰盘尺寸




建议安装开孔尺寸




SSMA-JWK




SSMA-KFK



法兰盘尺寸




建议安装开孔尺寸







SMA/SSMA-JJ

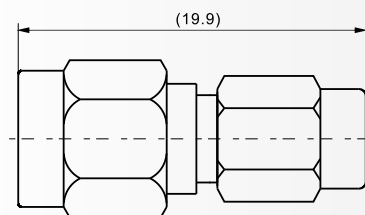


SMA/SSMA-KK

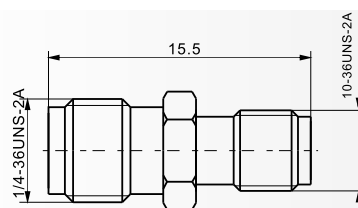


SMA/SSMA-KJ

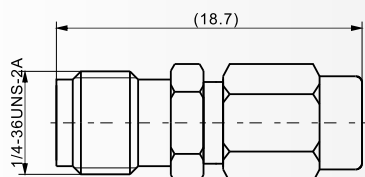

SMA/SSMA-JK

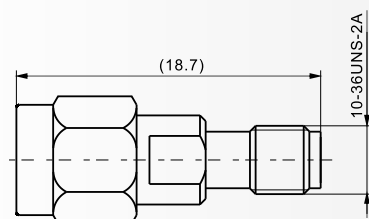

SSMA-50JR-1W

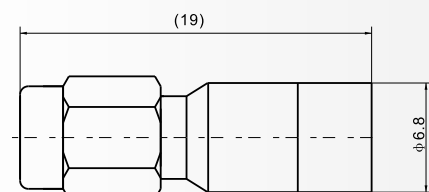

SSMA

系列射频同轴连接器
SERIES SSMA COAXIAL CONNECTORS



SSMA-50JRG-1W

