

isc N-Channel MOSFET Transistor

2SK955

DESCRIPTION



- Drain Current $-I_D=5A@ T_C=25^\circ C$
- Drain Source Voltage-
: $V_{DSS}=800V(\text{Min})$
- Fast Switching Speed

APPLICATIONS

- Designed especially for high voltage,high speed applications, such as off-line switching power supplies , UPS,AC and DC motor controls,relay and solenoid drivers.

ABSOLUTE MAXIMUM RATINGS($T_a=25^\circ C$)

SYMBOL	ARAMETER	VALUE	UNIT
V_{DSS}	Drain-Source Voltage ($V_{GS}=0$)	800	V
V_{GS}	Gate-Source Voltage	± 20	V
I_D	Drain Current-continuous@ $TC=25^\circ C$	5	A
P_{tot}	Total Dissipation@ $TC=25^\circ C$	125	W
T_j	Max. Operating Junction Temperature	80	$^\circ C$
T_{stg}	Storage Temperature Range	-55~150	$^\circ C$

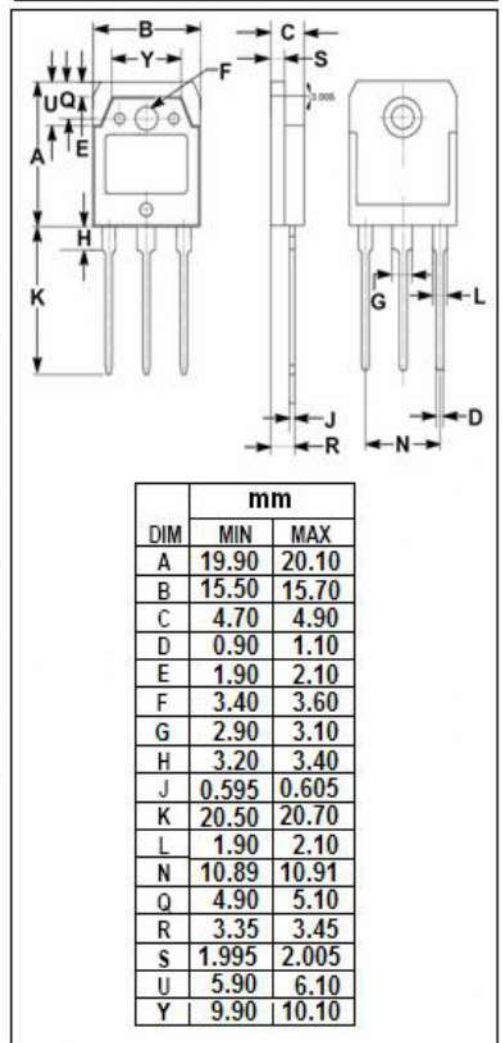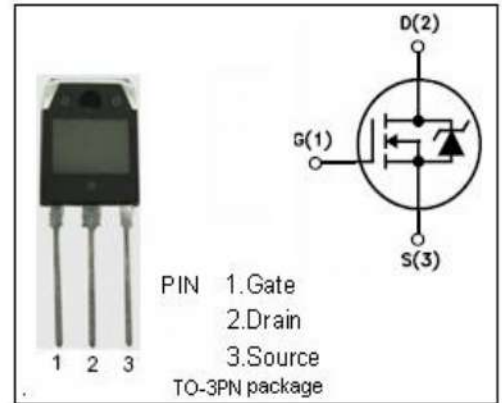

isc N-Channel Mosfet Transistor

2SK955

• ELECTRICAL CHARACTERISTICS ($T_c=25^\circ\text{C}$)

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP.	MAX	UNIT
$(BR)_{DSS}$	Drain-Source Breakdown Voltage	$V_{GS}=0; I_D=10\text{mA}$	800			V
$V_{GS(TH)}$	Gate Threshold Voltage	$V_{DS}=V_{GS}; I_D=10\text{mA}$	2.1	3.0	4.0	V
$R_{DS(ON)}$	Drain-Source On-stage Resistance	$V_{GS}=10\text{V}; I_D=2.5\text{A}$		1.5	2.0	Ω
I_{GSS}	Gate Source Leakage Current	$V_{GS}=\pm 20\text{V}; V_{DS}=0$			± 100	nA
I_{DSS}	Zero Gate Voltage Drain Current	$V_{DS}=800\text{V}; V_{GS}=0$			500	μA
t_{on}	Turn-on time	$V_{GS}=10\text{V}; I_D=2.5\text{A};$		110	170	ns
t_{off}	Turn-off time	$R_L=50\Omega$		420	530	ns
V_{SD}	Diode Forward Voltage	$I_F=5\text{A}; V_{GS}=0$		1.0	1.5	V