


COAXIAL CONNECTOR, N, 50 Ohm, Straight panel receptacle, jack (female), flange mount

23_N-50-0-16/133_N

Properties

- Screwed coupling mechanism for sturdy and reliable connection
- IP rating (interface, mated) IP67
- Interface dimensions according IEC/MIL

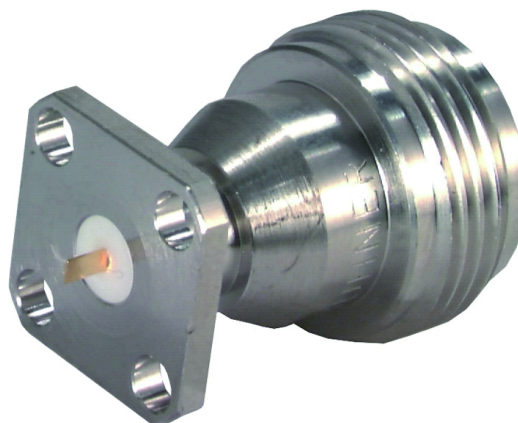

| Product configuration | | |
|-----------------------------|-----------------------------|--|
| Interface type | Gender | Standard |
| N | jack | IEC 61169-16_MIL-STD-348A/304_CECC 22210 |
| Interface and material data | | |
| Piece parts | Material | Plating |
| Centre contact | Copper Beryllium Alloy | Gold Plating (Nickel underplated) |
| Outer conductor | Brass | SUCOPLATE (R) Plating |
| Body | Brass | SUCOPLATE (R) Plating |
| Insulator | PFA / PTFE | |
| Electrical data | | |
| Impedance | 50 Ω | |
| Interface frequency | 11 GHz | |
| Mechanical data | | |
| Weight | 0.0141 kg | |
| Mating cycles | 500 | |
| Flange type | square flange / 12.7 X 12.7 | |
| Tab style | Stripline | |
| Environmental data | | |
| Operation temperature | -65 °C ... 125°C | |
| Ordering Information Table | | |
| Item number | Item description | Packaging type |
| 22641166 | 23_N-50-0-16/133_NE | Single |

COAXIAL CONNECTOR, N, 50 Ohm, Straight panel receptacle, jack (female), flange mount

23_N-50-0-16/133_N

HUBER+SUHNER is certified by ISO 9001, ISO 14001, ISO 45001, IATF 16949, AS/EN 9100 and ISO/TS 22163-IRIS. Waiver: Facts and figures herein are for information only and do not represent any warranty of any kind.
DOCUMENT PIM-P2735 / Date of publication: 26.11.2023 / uncontrolled copy