


# COAXIAL CONNECTOR, MMBX, 50 Ohm, Edge mount PCB jack (female)

92\_MMBX-S50-0-12/111\_N

## Properties

- Smallest board-to-board distance
- Very high frequencies
- Excellent return loss values
- Blind mateable
- Reliable and secure connection

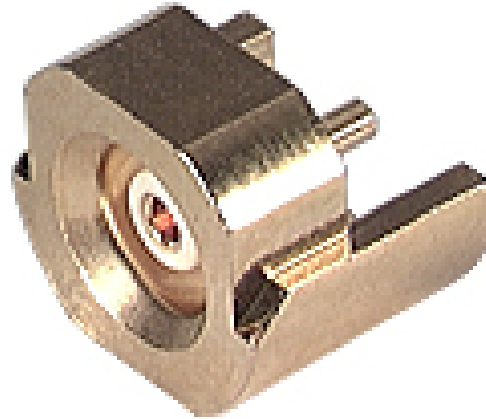

Product configuration		
Interface type	Gender	Standard
MMBX	jack	HUBER+SUHNER-MMBX
Interface and material data		
Piece parts	Material	Plating
Centre contact	Brass	SUCOPRO Plating
Outer conductor	Brass	SUCOPRO Plating
Body	Brass	SUCOPRO Plating
Insulator	LCP (Liquid crystal polymer)	
Electrical data		
Impedance	50 Ω	
Interface frequency	12.4 GHz	
Mechanical data		
Weight	0.0011 kg	
Mating cycles	100	
Board mounting type	edge mount	
Height above PCB HA	4 mm	
Disengagement force (to)	30 N	
Engagement force max	30 N	
Environmental data		
Operation temperature	-55 °C ... 155°C	

**COAXIAL CONNECTOR, MMBX, 50 Ohm, Edge mount PCB jack (female)**

92\_MMBX-S50-0-12/111\_N

<b>Ordering Information Table</b>			
Item number	Item description	Packaging type	Packaging information
84019159	92_MMBX-S50-0-12/111_NE	Single	
23038620	92_MMBX-S50-0-12/111_NM	Tape and Reel	650 pcs / Reel

<b>Additional Information</b>	
Remarks	PCB connector without stand-offs

HUBER+SUHNER is certified by ISO 9001, ISO 14001, ISO 45001, IATF 16949, AS/EN 9100 and ISO/TS 22163-IRIS. Waiver: Facts and figures herein are for information only and do not represent any warranty of any kind.  
DOCUMENT PIM-P1151 / Date of publication: 26.11.2023 / uncontrolled copy