


COAXIAL CONNECTOR, N, 50 Ohm, Right angle PCB jack (female)
85_N-50-0-5/13-_N

Properties

- Screwed coupling mechanism for sturdy and reliable connection
- IP rating (interface, mated) IP67
- Interface dimensions according IEC/MIL

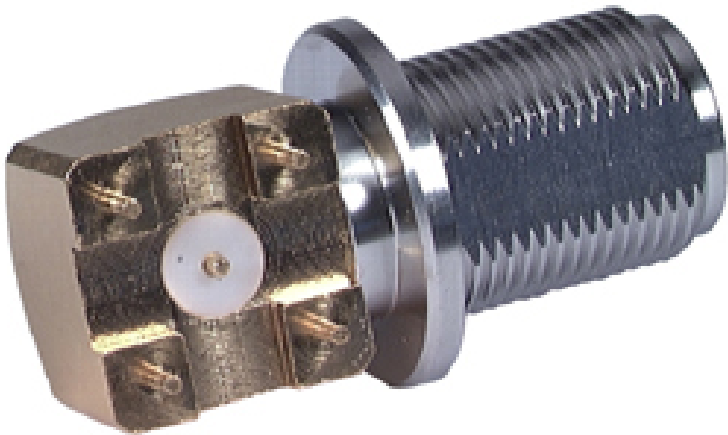

Product configuration		
Interface type	Gender	Standard
N	jack	IEC 61169-16_MIL-STD-348A/304_CECC 22210

Interface and material data		
Piece parts	Material	Plating
Centre contact	Copper Beryllium / Brass	Gold Plating (Nickel underplated)
Outer conductor	Brass	SUCOPLATE (R) Plating
Body	Brass	SUCOPLATE (R) Plating
Insulator	PFA / PTFE	
Gasket	VMQ (Silicone rubber)	
Fastening nut	Brass	SUCOPLATE (R) Plating
Washer	Bronze	SUCOPLATE (R) Plating

Electrical data	
Impedance	50 Ω
Interface frequency	11 GHz

Mechanical data	
Mating cycles	500
Board mounting type	through holes
Number of printlegs	4
Height above PCB HA	19,5 mm
Height of stand off HS	1,5 mm

Environmental data	
Operation temperature	-65 °C ... 165°C

COAXIAL CONNECTOR, N, 50 Ohm, Right angle PCB jack (female)
85_N-50-0-5/13-_N

Ordering Information Table		
Item number	Item description	Packaging type
23022018	85_N-50-0-5/13-_NY	Tray

Additional Information	
Remarks	PCB connector with stand-offs

HUBER+SUHNER is certified by ISO 9001, ISO 14001, ISO 45001, IATF 16949, AS/EN 9100 and ISO/TS 22163-IRIS. Waiver: Facts and figures herein are for information only and do not represent any warranty of any kind.
DOCUMENT PIM-PI280 / Date of publication: 26.11.2023 / uncontrolled copy