


COAXIAL CONNECTOR, SMA, 50 Ohm, Straight panel receptacle, jack (female), flange mount

23_SMA-50-0-324/111_N-

Properties

- Excellent return loss
- Intermateable with PC3.5 and SK
- Applicable in frequencies up to 18 GHz

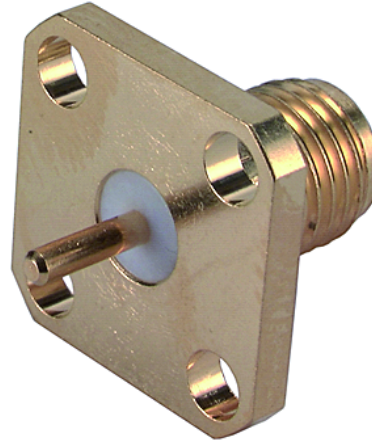

Product configuration		
Interface type	Gender	Standard
SMA	jack	IEC 60169-15_MIL-STD-348A/310_CECC 22110
Interface and material data		
Piece parts	Material	Plating
Centre contact	Copper Beryllium Alloy	SUCOPRO Plating
Outer conductor	Brass	SUCOPRO Plating
Body	Brass	SUCOPRO Plating
Insulator	PTFE (Polytetrafluoroethylene)	
Electrical data		
Impedance	50 Ω	
Interface frequency	18 GHz	
Mechanical data		
Weight	0.0025 kg	
Mating cycles	500	
Flange type	square flange / 12.7 X 12.7	
Tab style	Standard	
Environmental data		
Operation temperature	-65 °C ... 165°C	
Ordering Information Table		
Item number	Item description	Packaging type
84035778	23_SMA-50-0-324/111_NY	Tray

COAXIAL CONNECTOR, SMA, 50 Ohm, Straight panel receptacle, jack (female), flange mount

23_SMA-50-0-324/111_N-

HUBER+SUHNER is certified by ISO 9001, ISO 14001, ISO 45001, IATF 16949, AS/EN 9100 and ISO/TS 22163-IRIS. Waiver: Facts and figures herein are for information only and do not represent any warranty of any kind.
DOCUMENT PIM-P2701 / Date of publication: 26.11.2023 / uncontrolled copy