

**SN54HC114, SN74HC114**  
**DUAL J-K NEGATIVE-EDGE-TRIGGERED FLIP-FLOPS**  
**WITH PRESET, COMMON CLEAR, AND COMMON CLOCK**

D2684, DECEMBER 1982—REVISED SEPTEMBER 1987

- Package Options Include Plastic "Small Outline" Packages, Ceramic Chip Carriers, and Standard Plastic and Ceramic 300-mil DIPs
- Dependable Texas Instruments Quality and Reliability

#### description

These devices contain two independent J-K negative-edge-triggered flip-flops. A low level at the Preset or Clear inputs sets or resets the outputs regardless of the levels of the other inputs. When the Preset and Clear are inactive (high), data at the J and K inputs meeting the setup time requirements are transferred to the outputs on the negative-going edge of the clock pulse. Clock triggering occurs at a voltage level and is not directly related to the rise time of the clock pulse. Following the hold time interval, data at the J and K inputs may be changed without affecting the levels at the outputs. These versatile flip-flops can perform as toggle flip-flops by tying J and K high.

The SN54HC114 is characterized for operation over the full military temperature range of  $-55^{\circ}\text{C}$  to  $125^{\circ}\text{C}$ . The SN74HC114 is characterized for operation from  $-40^{\circ}\text{C}$  to  $85^{\circ}\text{C}$ .


FUNCTION TABLE

INPUTS					OUTPUTS	
PRE	CLR	CLK	J	K	Q	$\bar{Q}$
L	H	X	X	X	H	L
H	L	X	X	X	L	H
L	L	X	X	X	H <sup>‡</sup>	H <sup>‡</sup>
H	H	I	L	L	Q <sub>0</sub>	$\bar{Q}_0$
H	H	I	H	L	H	L
H	H	I	L	H	L	H
H	H	I	H	H	TOGGLE	
H	H	H	X	X	Q <sub>0</sub>	$\bar{Q}_0$

<sup>‡</sup>This configuration is nonstable; that is, it will not persist when either Preset or Clear returns to its inactive (high) level.


**SN54HC114 . . . J PACKAGE**  
**SN74HC114 . . . D OR N PACKAGE**

(TOP VIEW)




2

**SN54HC114 . . . FK PACKAGE**  
**(TOP VIEW)**



NC—No internal connection

#### logic symbol<sup>†</sup>



<sup>†</sup>This symbol is in accordance with ANSI/IEEE Std 91-1984 and IEC Publication 617-12.

Pin numbers shown are for D, J, and N packages.

**PRODUCTION DATA** documents contain information current as of publication date. Products conform to specifications per the terms of Texas Instruments standard warranty. Production processing does not necessarily include testing of all parameters.

Copyright © 1982, Texas Instruments Incorporated


**TEXAS**  
**INSTRUMENTS**

POST OFFICE BOX 655012 • DALLAS, TEXAS 75265

2-149

# SN54HC114, SN74HC114 DUAL J-K NEGATIVE-EDGE-TRIGGERED FLIP-FLOPS WITH PRESET, COMMON CLEAR, AND COMMON CLOCK

logic diagram, each flip-flop (positive logic)

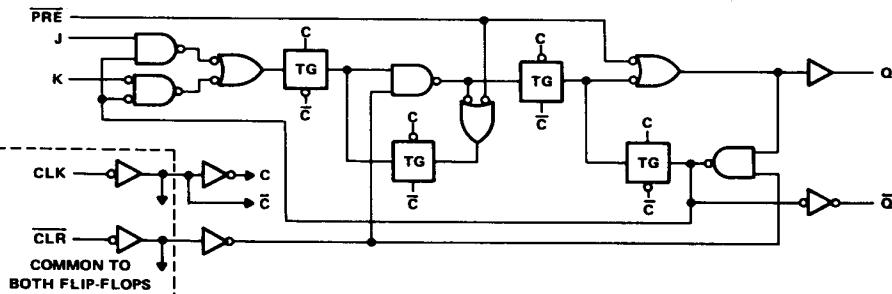

2

HCMOS Devices

## absolute maximum ratings over operating free-air temperature range<sup>†</sup>

Supply voltage, V <sub>CC</sub> . . . . .	-0.5 V to 7 V
Input clamp current, I <sub>IK</sub> (V <sub>I</sub> < 0 or V <sub>I</sub> > V <sub>CC</sub> ) . . . . .	± 20 mA
Output clamp current, I <sub>OK</sub> (V <sub>O</sub> < 0 or V <sub>O</sub> > V <sub>CC</sub> ) . . . . .	± 20 mA
Continuous output current, I <sub>O</sub> (V <sub>O</sub> = 0 to V <sub>CC</sub> ) . . . . .	± 25 mA
Continuous current through V <sub>CC</sub> or GND pins . . . . .	± 50 mA
Lead temperature 1.6 mm (1/16 in) from case for 60 s: FK or J package . . . . .	300°C
Lead temperature 1.6 mm (1/16 in) from case for 10 s: D or N package . . . . .	260°C
Storage temperature range . . . . .	-65°C to 150°C

<sup>†</sup> Stresses beyond those listed under "absolute maximum ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under "recommended operating conditions" is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

## recommended operating conditions

	SN54HC114			SN74HC114			UNIT
	MIN	NOM	MAX	MIN	NOM	MAX	
V <sub>CC</sub> Supply voltage	2	5	6	2	5	6	V
V <sub>IH</sub> High-level input voltage	V <sub>CC</sub> = 2 V V <sub>CC</sub> = 4.5 V V <sub>CC</sub> = 6 V	1.5 3.15 4.2		1.5 3.15 4.2			V
V <sub>IL</sub> Low-level input voltage	V <sub>CC</sub> = 2 V V <sub>CC</sub> = 4.5 V V <sub>CC</sub> = 6 V	0 0 0	0.3 0.9 1.2	0 0 0	0.3 0.9 1.2		V
V <sub>I</sub> Input voltage		0	V <sub>CC</sub>	0	V <sub>CC</sub>		V
V <sub>O</sub> Output voltage		0	V <sub>CC</sub>	0	V <sub>CC</sub>		V
t <sub>t</sub> Input transition (rise and fall) times	V <sub>CC</sub> = 2 V V <sub>CC</sub> = 4.5 V V <sub>CC</sub> = 6 V	0 0 0	1000 500 400	0 0 0	1000 500 400		ns
T <sub>A</sub> Operating free-air temperature		-55	125	-40	85		°C

**SN54HC114, SN74HC114**  
**DUAL J-K NEGATIVE-EDGE-TRIGGERED FLIP-FLOPS**  
**WITH PRESET, COMMON CLEAR, AND COMMON CLOCK**

**electrical characteristics over recommended operating free-air temperature range (unless otherwise noted)**

PARAMETER	TEST CONDITIONS	V <sub>CC</sub>	T <sub>A</sub> = 25°C			SN54HC114		SN74HC114		UNIT
			MIN	Typ	MAX	MIN	MAX	MIN	MAX	
V <sub>OH</sub>	V <sub>I</sub> = V <sub>IH</sub> or V <sub>IL</sub> , I <sub>OH</sub> = -20 µA	2 V	1.9	1.998	2	1.9	1.9	1.9	1.9	V
		4.5 V	4.4	4.499	5	4.4	4.4	4.4	4.4	
		6 V	5.9	5.999	6	5.9	5.9	5.9	5.9	
	V <sub>I</sub> = V <sub>IH</sub> or V <sub>IL</sub> , I <sub>OH</sub> = -4 mA	4.5 V	3.98	4.30	4	3.7	3.84	3.84	3.84	
V <sub>OL</sub>	V <sub>I</sub> = V <sub>IH</sub> or V <sub>IL</sub> , I <sub>OL</sub> = -5.2 mA	6 V	5.48	5.80	6	5.2	5.34	5.34	5.34	V
	V <sub>I</sub> = V <sub>IH</sub> or V <sub>IL</sub> , I <sub>OL</sub> = 20 µA	2 V	0.002	0.1	2	0.1	0.1	0.1	0.1	
		4.5 V	0.001	0.1	4	0.1	0.1	0.1	0.1	
		6 V	0.001	0.1	6	0.1	0.1	0.1	0.1	
I <sub>I</sub>	V <sub>I</sub> = V <sub>CC</sub> or 0	4.5 V	0.17	0.26	4	0.4	0.4	0.33	0.33	nA
		6 V	0.15	0.26	6	0.4	0.4	0.33	0.33	
I <sub>CC</sub>	V <sub>I</sub> = V <sub>CC</sub> or 0, I <sub>O</sub> = 0	2 to 6 V	3	10	2 to 6 V	10	10	10	10	µA
C <sub>i</sub>										pF

2

HCMOS Devices

**timing requirements over recommended operating free-air temperature range (unless otherwise noted)**

		V <sub>CC</sub>	T <sub>A</sub> = 25°C		SN54HC114		SN74HC114		UNIT	
			MIN	MAX	MIN	MAX	MIN	MAX		
t <sub>clock</sub>	Clock frequency		2 V	0	5	0	3.4	0	4	MHz
		4.5 V	0	25	0	17	0	20		
		6 V	0	29	0	20	0	24		
t <sub>w</sub>	Pulse duration	PRE or CLR low	2 V	100	150	125	125	125	ns	
			4.5 V	20	30	25	25	25		
		CLK high or low	6 V	17	25	21	21	21		
			2 V	100	150	125	125	125		
t <sub>su</sub>	Setup time before CLK1	Data (J, K)	4.5 V	20	30	25	25	25	ns	
			6 V	17	25	21	21	21		
		PRE or CLR inactive	2 V	100	150	125	125	125		
			4.5 V	20	30	25	25	25		
t <sub>h</sub>	Hold time, data after CLK1		6 V	17	25	21	21	21	ns	
		2 V	0	0	0	0	0	0		
		4.5 V	0	0	0	0	0	0		
		6 V	0	0	0	0	0	0		



POST OFFICE BOX 655012 • DALLAS, TEXAS 75265

**SN54HC114, SN74HC114  
DUAL J-K NEGATIVE-EDGE-TRIGGERED FLIP-FLOPS  
WITH PRESET, COMMON CLEAR, AND COMMON CLOCK**

switching characteristics over recommended operating free-air temperature range (unless otherwise noted),  $C_L = 50 \text{ pF}$  (see Note 1)

PARAMETER	FROM (INPUT)	TO (OUTPUT)	V <sub>CC</sub>	T <sub>A</sub> = 25°C			SN54HC114		SN74HC114		UNIT
				MIN	Typ	MAX	MIN	MAX	MIN	MAX	
$f_{\text{max}}$			2 V	5	9	3.4	4				MHz
			4.5 V	25	45	17	20				
			6 V	29	50	20	24				
$t_{pd}$	PRE or CLR	Q or $\bar{Q}$	2 V	75	175	250	220				ns
			4.5 V	20	35	50	44				
			6 V	17	30	42	37				
$t_{pd}$	CLK	Q or $\bar{Q}$	2 V	63	175	250	220				ns
			4.5 V	19	35	50	44				
			6 V	16	30	42	37				
$t_t$		Q or $\bar{Q}$	2 V	28	75	110	95				ns
			4.5 V	8	15	22	19				
			6 V	6	13	19	16				

$C_{pd}$	Power dissipation capacitance per flip-flop	No load, $T_A = 25^\circ\text{C}$	50 pF typ
----------	---	-----------------------------------	-----------

NOTE 1: Load circuit and voltage waveforms are shown in Section 1.