


# COAXIAL CONNECTOR, TNC, 50 Ohm, Straight bulkhead receptacle, jack (female)

22\_TNC-50-0-1/133\_N

## Properties

- Wide range of different configurations
- Most common interfaces available
- Accurate transitions
- Effective and reliable interconnection solutions
- Appropriate materials

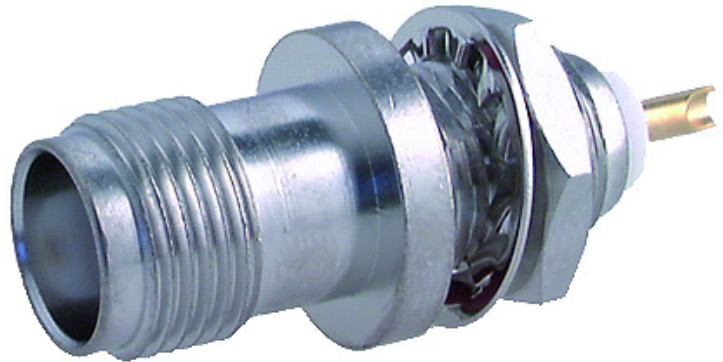

Product configuration		
Interface type	Gender	Standard
TNC	jack	IEC 60169-17_MIL-STD-348A/313_CECC 22200

Interface and material data		
Piece parts	Material	Plating
Centre contact	Copper Beryllium Alloy	Gold Plating (Nickel underplated)
Outer conductor	Brass	SUCOPLATE (R) Plating
Body	Brass	SUCOPLATE (R) Plating
Insulator	PFA / PTFE	
Gasket	VMQ (Silicone rubber)	
Fastening nut	Brass	SUCOPLATE (R) Plating
Washer	Bronze	SUCOPLATE (R) Plating

Electrical data	
Impedance	50 Ω
Interface frequency	11 GHz

Mechanical data	
Weight	0.0118 kg
Mating cycles	500
Flange type	round flange / dia. 14.5
Tab style	solder end

Environmental data	
Operation temperature	-65 °C ... 165 °C

**COAXIAL CONNECTOR, TNC, 50 Ohm, Straight bulkhead receptacle, jack (female)**  
22\_TNC-50-0-1/133\_N

Ordering Information Table		
Item number	Item description	Packaging type
22640537	22_TNC-50-0-1/133_NE	Single

HUBER+SUHNER is certified by ISO 9001, ISO 14001, ISO 45001, IATF 16949, AS/EN 9100 and ISO/TS 22163-IRIS. Waiver: Facts and figures herein are for information only and do not represent any warranty of any kind.  
DOCUMENT PIM-P2761 / Date of publication: 26.11.2023 / uncontrolled copy