


# COAXIAL CONNECTOR, BNC, 50 Ohm, Straight panel receptacle, jack (female), flange mount

23\_BNC-50-0-2/133\_N

## Properties

- Useful for frequently coupled and uncoupled connections
- Available for 50 ohm and 75 ohm applications
- Applicable in frequencies up to 4 GHz

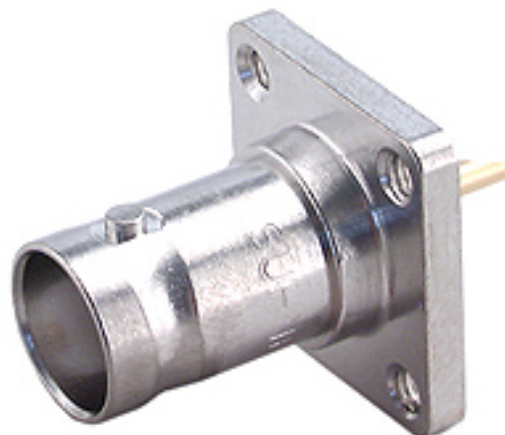

## Product configuration

Interface type	Standard
BNC	IEC 60169-8_MIL-STD-348A/301_CECC 22120

## Interface and material data

Piece parts	Material	Plating
Centre contact	Copper Beryllium Alloy	Gold Plating (Nickel underplated)
Outer conductor	Brass	SUCOPLATE (R) Plating
Body	Brass	SUCOPLATE (R) Plating
Insulator	PFA / PTFE	

## Electrical data

Impedance	50 Ω
Interface frequency	4 GHz

## Mechanical data

Weight	0.017 kg
Mating cycles	500
Flange type	square flange / 25.4 X 25.4
Tab style	solder end

## Environmental data

Operation temperature	-65 °C ... 165 °C
-----------------------	-------------------

## Ordering Information Table

Item number	Item description
22540333	23_BNC-50-0-2/133_NE

---

**COAXIAL CONNECTOR, BNC, 50 Ohm, Straight panel receptacle, jack (female), flange mount**

23\_BNC-50-0-2/133\_N

HUBER+SUHNER is certified by ISO 9001, ISO 14001, ISO 45001, IATF 16949, AS/EN 9100 and ISO/TS 22163-IRIS. Waiver: Facts and figures herein are for information only and do not represent any warranty of any kind.  
DOCUMENT PIM-P31315 / Date of publication: 03.06.2024 / uncontrolled copy