

SINGLE POLE OptoMOS® RELAYS

LCA110/LCA110L



FEATURES


- Small 6 Pin DIP Package
- Low Drive Power Requirements (TTL/CMOS Compatible)
- No Moving Parts
- High Reliability
- Arc-Free With No Snubbing Circuits
- 3750V_{RMS} Input/Output Isolation
- FCC Compatible
- VDE Compatible
- No EMI/RFI Generation
- Machine Insertable, Wave Solderable
- Current Limiting, Surface Mount and Tape & Reel Versions Available

APPROVALS

- UL Recognized: File Number E76270
- CSA Certified: File Number LR 43639-10
- BSI Certified to:
 - BS EN 60950:1992 (BS7002:1992)
Certificate #: 7344
 - BS EN 41003:1993
Certificate #: 7344

OPTIONS / SUFFIXES

- L: Current Limiting
- S: Surface Mount Package
- TR: Tape & Reel

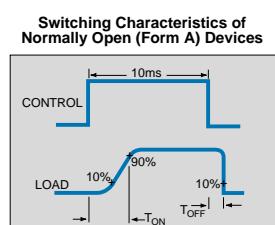

DESCRIPTION

LCA110 is a 350V, 120mA, 35Ω 1-Form-A relay. It provides a perfect solution where high sensitivity is required. Current limiting version is available. ("L" suffix)

APPLICATIONS

- Telecommunications
 - Telecom Switching
 - Tip/Ring Circuits
 - Modem Switching (Laptop, Notebook, Pocket Size)
 - Hookswitch
 - Dial Pulsing
 - Ground Start
 - Ringer Injection
- Instrumentation
 - Multiplexers
 - Data Acquisition
 - Electronic Switching
 - I/O Subsystems
 - Meters (Watt-Hour, Water, Gas)
- Medical Equipment—Patient/Equipment Isolation
- Security
- Aerospace
- Industrial Controls

RATINGS (@ 25° C)

| Parameter | Min | Typ | Max | Units |
|---|------|-----|------------------|------------------|
| Input Power Dissipation | - | - | 150 ¹ | mW |
| Input Control Current Peak (10ms) | - | - | 50 | mA |
| Reverse Input Voltage | - | - | 5 | V |
| Total Power Dissipation | - | - | 800 ² | mW |
| Capacitance Input to Output | - | 3 | - | pF |
| Isolation Voltage Input to Output | 3750 | - | - | V _{RMS} |
| Operational Temperature | -40 | - | +85 | °C |
| Storage Temperature | -40 | - | +125 | °C |
| Soldering Temperature DIP Package | - | - | +260 | °C |
| Surface Mount Package (10 Seconds Max.) | - | - | +220 | °C |

¹ Derate Linearly 1.33 mw/°C

² Derate Linearly 6.67 mw/°C

Note: For Mechanical Dimensions See Pages 408-415

www.clare.com

SINGLE POLE OptoMOS® RELAYS


LCA110/LCA110L

SPECIFICATIONS

| PARAMETER | CONDITIONS | SYMBOL | LCA110 | | | LCA110L | | | UNITS |
|--------------------------------------|--|-------------------|--------|-----|-----|---------|-----|-----|------------------|
| | | | MIN | TYP | MAX | MIN | TYP | MAX | |
| Output Characteristics @ 25°C | | | | | | | | | |
| Load Voltage (Peak) | - | V _L | - | - | 350 | - | - | 350 | V |
| Load Current (Continuous) | | | | | | | | | |
| AC/DC Configuration | - | I _L | - | - | 120 | - | - | 120 | mA |
| DC Configuration | - | I _L | - | - | 200 | - | - | 200 | mA |
| Peak Load Current | 10ms | I _{LPK} | - | - | 350 | - | - | - | mA |
| On-Resistance | | | | | | | | | |
| AC/DC Configuration | I _L =120mA | R _{ON} | - | 23 | 35 | - | 19 | 35 | Ω |
| DC Configuration | I _L =200mA | R _{ON} | - | 7 | 10 | - | 7 | 10 | Ω |
| Off-State Leakage Current | V _L =350V | I _{LEAK} | - | - | 1 | - | - | 1 | μA |
| Switching Speeds | | | | | | | | | |
| Turn-On | I _F =5mA, V _L =10V | T _{ON} | - | - | 3 | - | - | 3 | ms |
| Turn-Off | I _F =5mA, V _L =10V | T _{OFF} | - | - | 3 | - | - | 3 | ms |
| Output Capacitance | 50V; f=1MHz | C _{OUT} | - | 25 | - | - | 25 | - | pF |
| Load Current Limiting | | I _{CL} | - | - | - | 130 | 170 | 210 | mA |
| Input Characteristics @ 25°C | | | | | | | | | |
| Input Control Current | I _L =120mA | I _F | 2 | - | 50 | 2 | - | 50 | mA |
| Input Dropout Current | - | I _F | 0.4 | 0.7 | - | 0.4 | 0.7 | - | mA |
| Input Voltage Drop | I _F =5mA | V _F | 0.9 | 1.2 | 1.4 | 0.9 | 1.2 | 1.4 | V |
| Reverse Input Voltage | - | V _R | - | - | 5 | - | - | 5 | V |
| Reverse Input Current | V _R =5V | I _R | - | - | 10 | - | - | 10 | μA |
| Input to Output Capacitance | - | C _{I/O} | - | 3 | - | - | 3 | - | pF |
| Input to Output Isolation | - | V _{I/O} | 3750 | - | - | 3750 | - | - | V _{RMS} |


LCA110/LCA110L Pinout

AC/DC Configuration

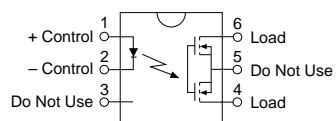

LCA110/LCA110L Pinout

DC Only Configuration

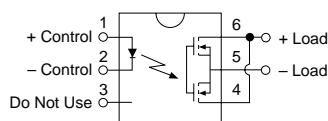

Note: For Mechanical Dimensions See Pages 408-415

North America: 1-800-272-5273

Europe: 32-11-300868













Asia: 886-2-2523-6368

Japan: 03-3980-2212

SINGLE POLE OptoMOS® RELAYS

LCA110/LCA110L









PERFORMANCE DATA

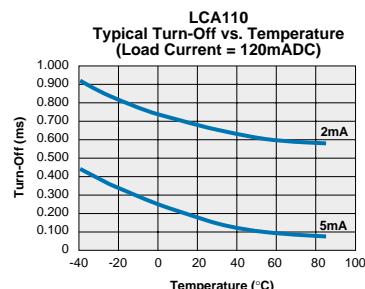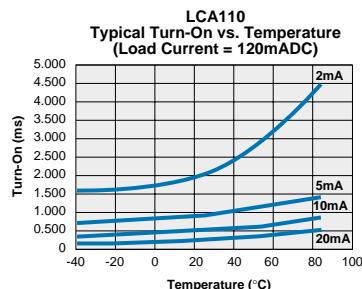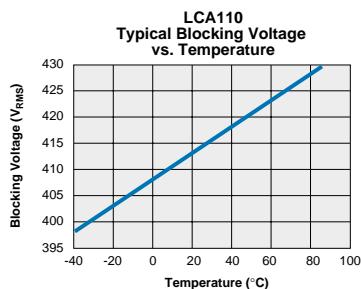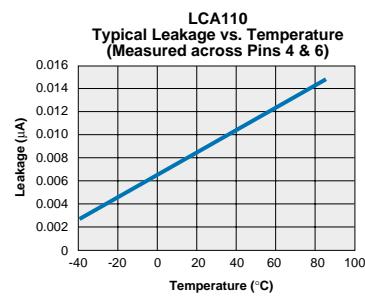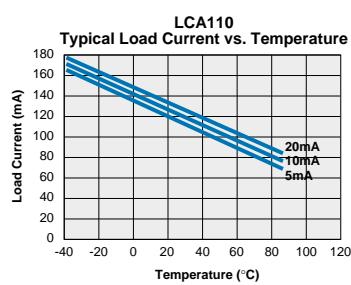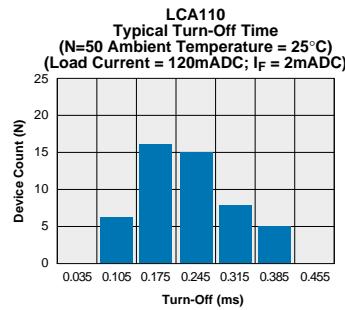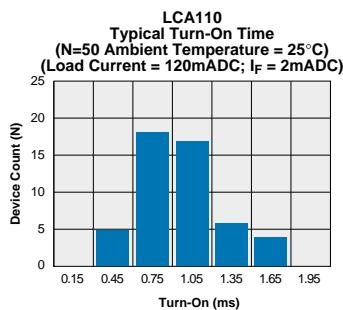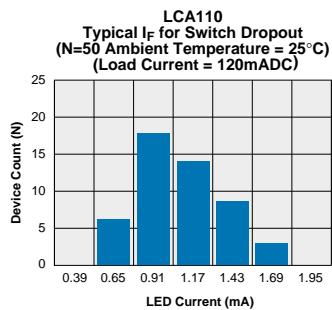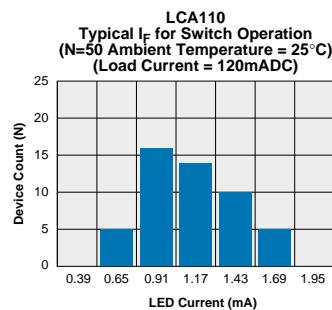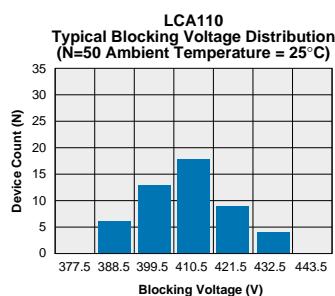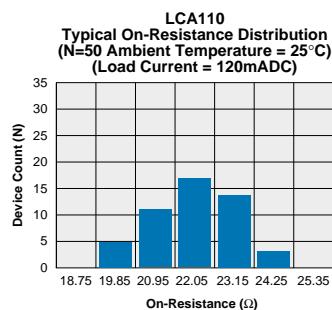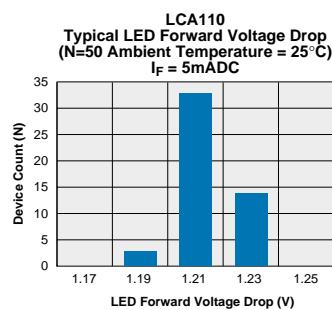

SINGLE POLE OptoMOS® RELAYS

LCA110/LCA110L













PERFORMANCE DATA

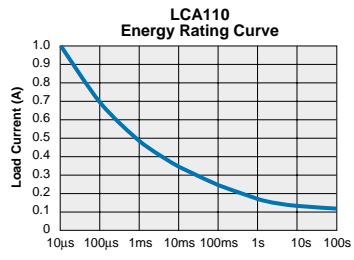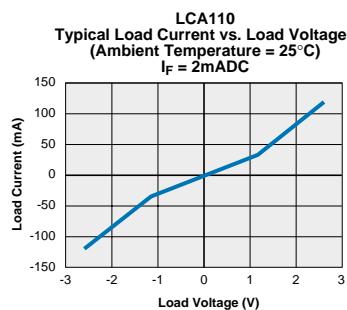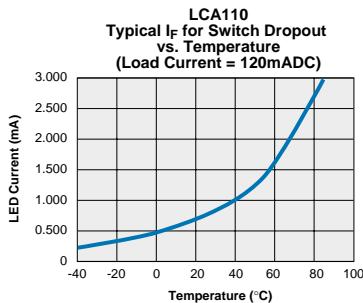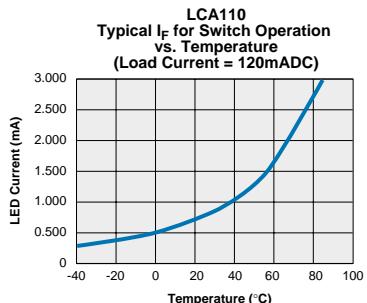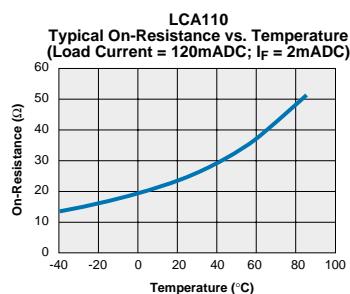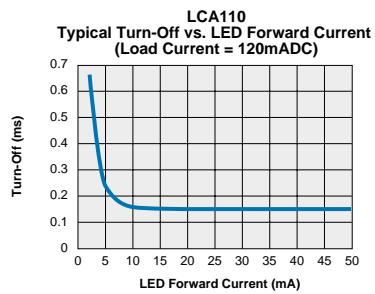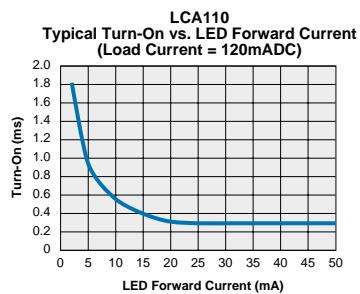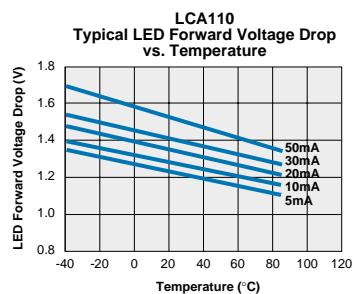

SINGLE POLE OptoMOS® RELAYS

LCA110/LCA110L

PERFORMANCE DATA

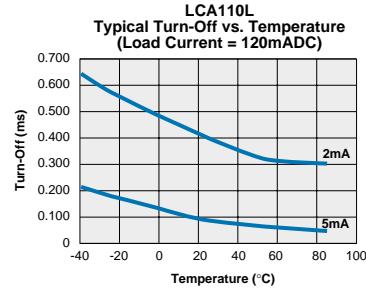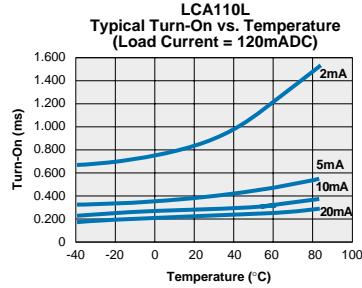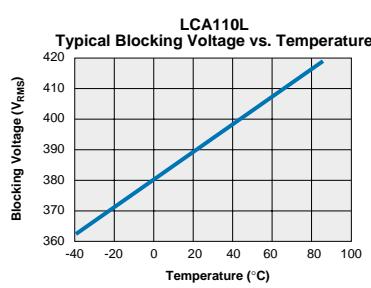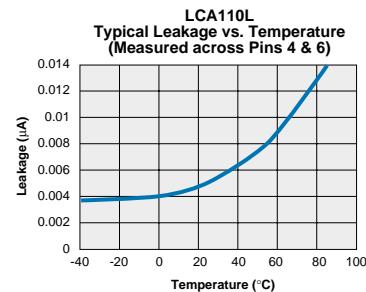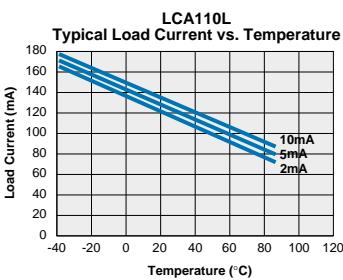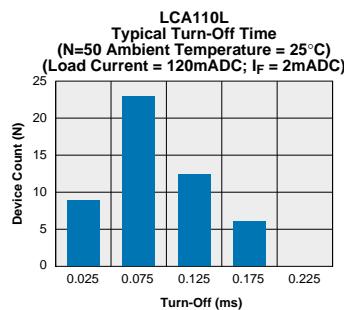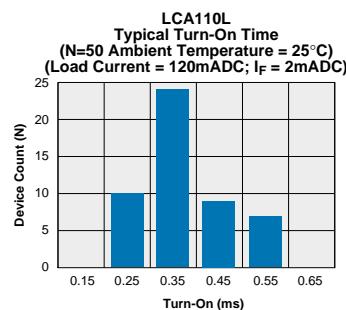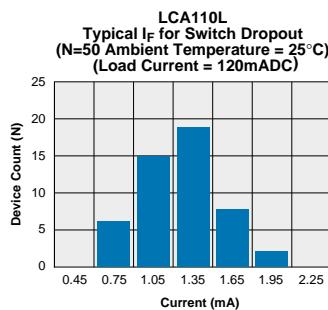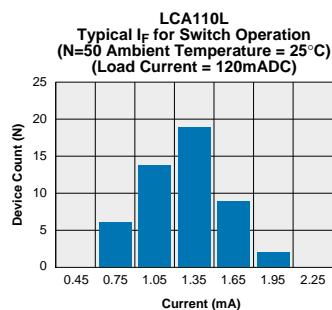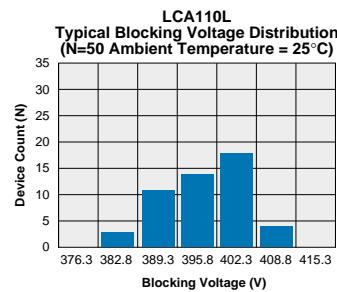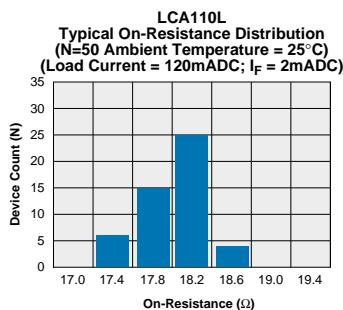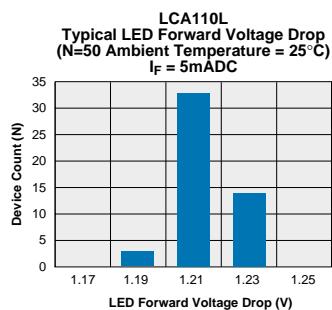

SINGLE POLE OptoMOS® RELAYS

LCA110/LCA110L

PERFORMANCE DATA

