

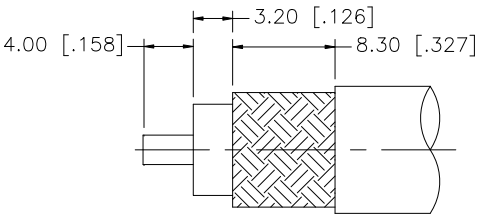
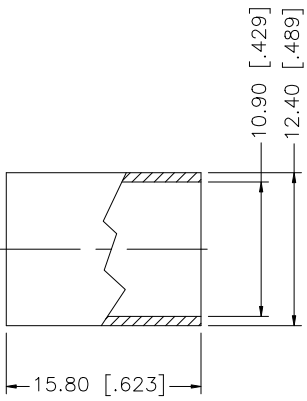


REV.	DATE	ECR NO.	DESCRIPTION
NC	08/09/99	—	INITIAL RELEASE
A	02/05/09	—	UPDATE DRAWING FORMAT, ADD CRIMP NOTES.



RECOMMENDED
CABLE STRIPPING DIM'S

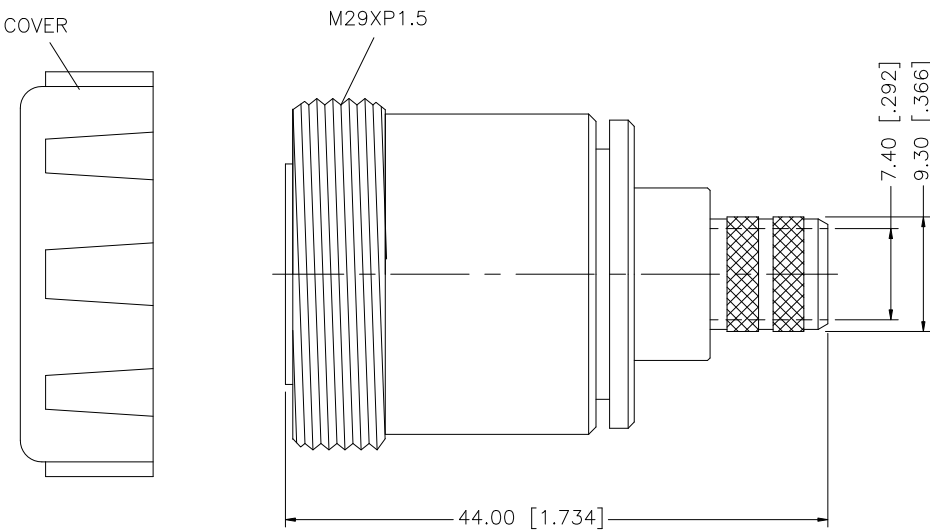

NOTES:

1. CRIMPED FERRULE HEX CRIMP SIZE .429 [10.89]
2. CONTACT PIN TO SOLDER.

8					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007” .315 – 1.180 = ± 0.015” 1.180 – 4.724 = ± 0.020” DO NOT SCALE DRAWING	APPROVALS		DATE		Amphenol Connex PART DESCRIPTION 7/16 CRIMP JACK (FOR RG 5/U, 213/U, 393/U CABLE)								
7	COVER	PE	BLUE	1		DRAWN	GRS	02/11/09										
6	FERRULE	COPPER	NEXCOTE	1		CHECKED												
5	GASKET	SILICONE	RED	1		ISSUED				PART NO. 272142								
4	CONTACT PIN	BER. COPPER	GOLD	1		SHEET	1 OF 1											
3	INSULATOR	PTFE	NATURAL	1		CAD FILE C:/272/272142.DWG					DWG. NO. 272142.DWG					REV. NC	SIZE A	SCALE NA
2	BARREL	BRASS	NEXCOTE	1														
1	BODY	BRASS	NEXCOTE	1														
DESCRIPTION					MATERIAL	FINISH	QTY											