


COAXIAL CONNECTOR, N, 50 Ohm, Straight cable plug (male)

11_N-50-7-33/133_N

Properties

- Screwed coupling mechanism for sturdy and reliable connection
- IP rating (interface, mated) IP67
- Interface dimensions according IEC/MIL

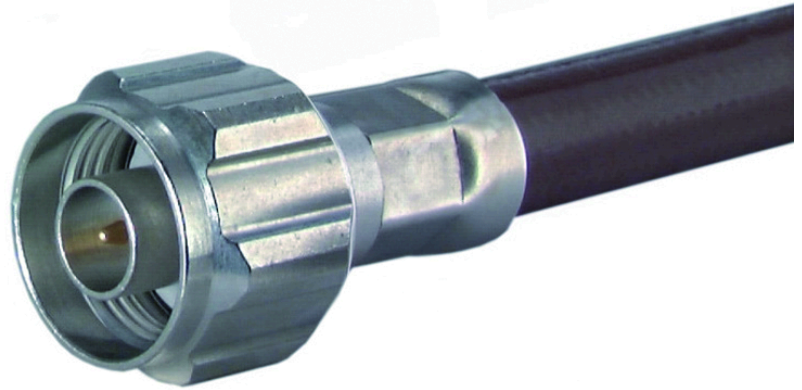

Product configuration		
Interface type	Gender	Standard
N	plug	IEC 61169-16_MIL-STD-348A/304_CECC 22210

Interface and material data		
Piece parts	Material	Plating
Centre contact	Brass	Gold Plating (Nickel underplated)
Outer conductor	Brass	SUCOPLATE (R) Plating
Body	Brass	SUCOPLATE (R) Plating
Insulator	PFA / PTFE	
Coupling nut	Brass	SUCOPLATE (R) Plating
Gasket	VMQ (Silicone rubber)	
Crimp ferrule	Copper	SUCOPLATE (R) Plating

Electrical data	
Impedance	50 Ω
Interface frequency	11 GHz

Electrical Data (frequency related)		
Frequency range	Return loss	VSWR
0.1 GHz ... 2 GHz	30 dB	1.065
2 GHz ... 4 GHz	25.8 dB	1.108
4 GHz ... 6 GHz	25 dB	1.119

Mechanical data	
Weight	0.0376 kg
Mating cycles	500
Cable entry centre contact	crimped

COAXIAL CONNECTOR, N, 50 Ohm, Straight cable plug (male)

11_N-50-7-33/133_N

Mechanical data		
Cable entry outer contact	crimped	
Environmental data		
Operation temperature	-65 °C ... 165°C	
Ordering Information Table		
Item number	Item description	Packaging type
22641614	11_N-50-7-33/133_NE	Single
Suitable cables		
Cable group	U99 - Customer specific	
Additional Information		
Only as assembly	No	

HUBER+SUHNER is certified by ISO 9001, ISO 14001, ISO 45001, IATF 16949, AS/EN 9100 and ISO/TS 22163-IRIS. Waiver: Facts and figures herein are for information only and do not represent any warranty of any kind.
DOCUMENT PIM-P3570 / Date of publication: 25.11.2023 / uncontrolled copy