

L29 (7/16) 系列产品是按照IEC169—4, CECC22230和DIN47223的相关要求生产的一种较大型螺纹同轴连接器。具有坚固稳定, 低损耗, 工作电压高等特点, 且大部分具有防水结构, 可用于户外作业为中, 高能量传输的连接器, 广泛用于微波传输和移动通信系统中。


Series L29 RF coaxial connectors are one kind of large screw-coupling RF coaxial connectors which developed according to the specification of IEC 169, CECC 22230 and DIN 47223. The characteristics are tightness, stabilization, less wastage and high voltage rating etc. They are water-proof for high energy transfers out-of-doors. They are mostly used in communication systems and radio transceivers.



主要技术特性			KEY PERFORMANCE		
温度范围 Temperature range		-65~+155℃	绝缘电阻 Insulation resistance		≥5000MΩ
特性阻抗 Characteristic Impedance		50 Ω	耐压 Withstanding voltage		4000V(rms)
频率范围 Frequency range		DC~7.5GHz	电压驻波比 VSWR	直 式 Straight	≤1.25
工作电压 Voltage rating		2700V(rms)		弯 式 Right angle	≤1.40
接触电阻 Contact resistance	中心导体 Center conductor	≤0.001 Ω	寿 命 Durability		500 Cycles
	外导体 Outer conductor	≤0.0005 Ω			

头部配合尺寸

INTERFACE MATING DIMENSIONS

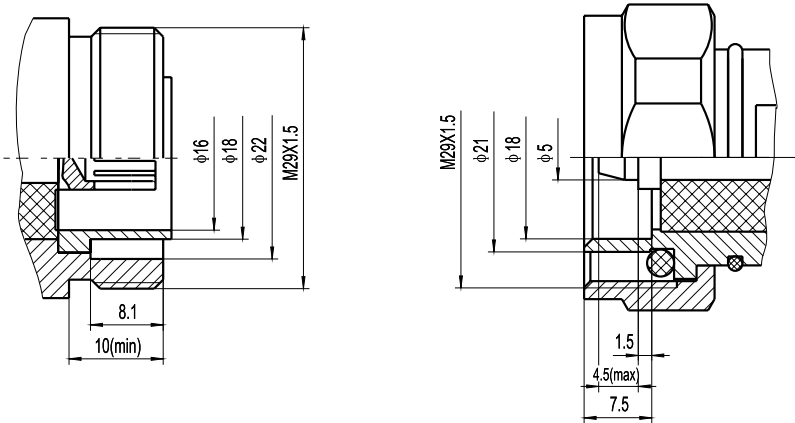


L29


系列射频同轴连接器
SERIES L29 COAXIAL CONNECTORS




L29/N-50KJ




L29/N-50JK




L29/N-50JJ

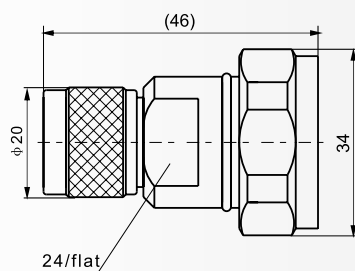


L29/N-50KK



L29-J7

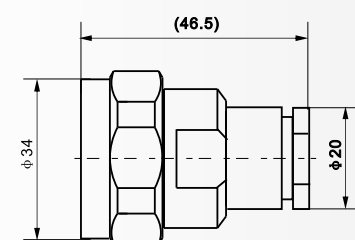


电缆剥线尺寸




Type	Cable Type
L29-J7	SYV-50-7-1

L29系列射频同轴连接器
SERIES L29 COAXIAL CONNECTORS


L29-50KFD1




建议安装开孔尺寸




L29-50KFDG




建议安装开孔尺寸




L29-KFD2



建议安装开孔尺寸




L29-J38、L29-J38G

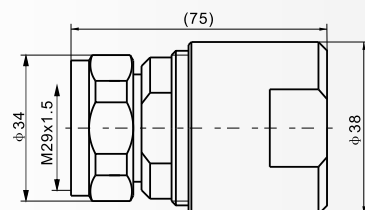

Cable type: SFCG-50-23



L29-50JFSG

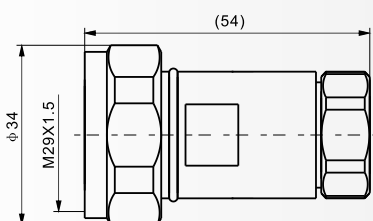


Cable type: FSJ4-50B

L29

系列射频同轴连接器
SERIES L29 COAXIAL CONNECTORS




L29-J7、L29-J9

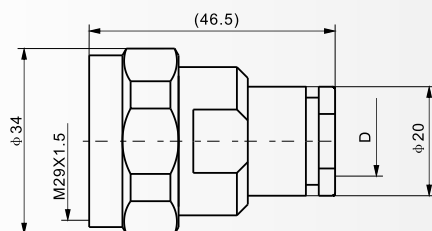


L29-J7	Cabletype:SYV-50-7-1	D=φ10.5
L29-J9	Cabletype:SYV-50-9	D=φ12.8



L29-KF9




建议安装开孔尺寸



Cable type: SYV-50-9




L29-J7/8

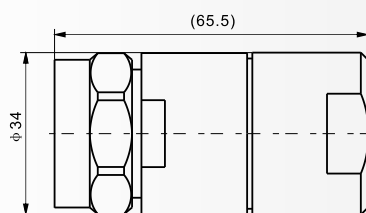

Cable type: LDF5 内导体连接方式为插接式




L29-KLDF5

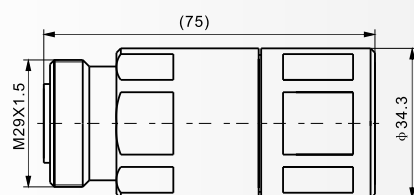

Cable type: LDF5 内导体连接方式为插接式



ZL29-J38

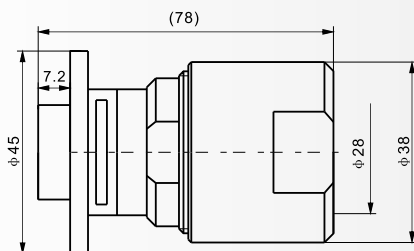


Cable type: SFCG-50-23

L29


系列射频同轴连接器
SERIES L29 COAXIAL CONNECTORS



L29-KFSJ2




建议安装开孔尺寸




Cable type: FSJ2-50



L29-KFSJ1




建议安装开孔尺寸



Cable type: FSJ1-50A



L29-KWFSJ1



Cable type: FSJ1-50A